


ΠΡΕΣΑΡΙΣΤΑ ΕΞΑΡΤΗΜΑΤΑ ΠΟΛΥΣΤΡΩΜΑΤΙΚΩΝ ΣΩΛΗΝΩΝ
ΣΥΝΔΕΣΜΟΙ ΑΡΣΕΝΙΚΟΙ

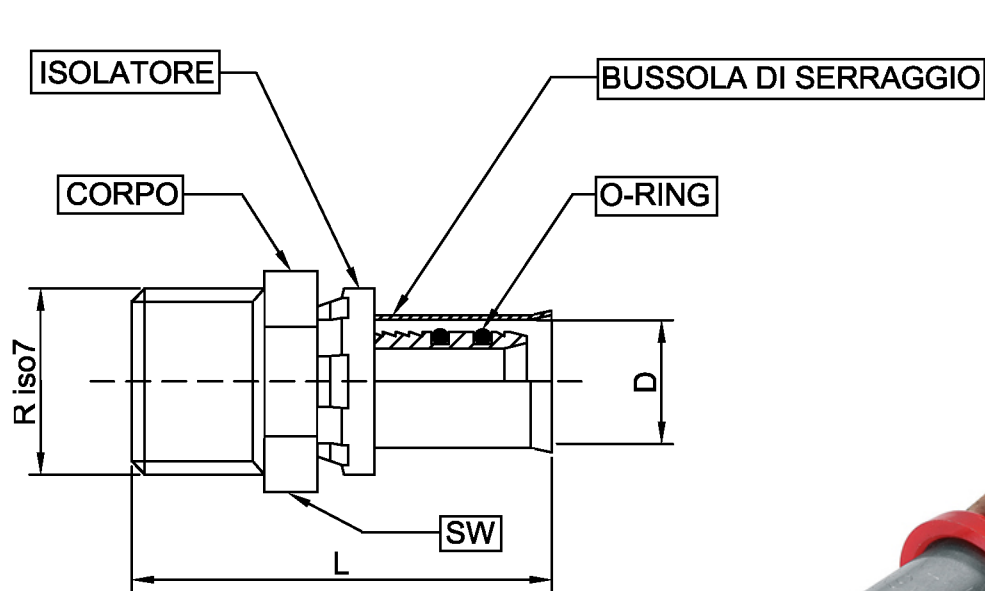

TDM Code	Size	R	D	L	SW
1630 1216	1/2xØ16	1/2	Ø16 (2.0)	48	21
1630 1218	1/2xØ18	1/2	Ø18 (2.0)	48	21
1630 1220	1/2xØ20	1/2	Ø20 (2.0)	48	21
1630 3416	3/4xØ16	3/4	Ø16 (2.0)	51	27
1630 3418	3/4xØ18	3/4	Ø18 (2.0)	51	27
1630 3420	3/4xØ20	3/4	Ø20 (2.0)	51	27
1630 3426	3/4xØ26	3/4	Ø26 (3.0)	50.5	27
1630 0126	1"xØ26	1"	Ø26 (3.0)	54	33
1630 0132	1"xØ32	1"	Ø32 (3.0)	55	33

CORPO	CW 617N EN12164
BUSSOLA DI SERRAGGIO	AISI 304 EN 10088-2
O-RING	EPDM PEROX
ISOLATORE	NAYLON.6 (Red)
PRESSIONE MAX BAR	10
TEMPERATURA min-Max	-20°C / +120°C

CONFORME ALLE NORMATIVE
1) DM 174 del 6 Aprile 2004
2) UNI EN 1254-3
3) UNI EN ISO 9001-2008
4) UNI EN 10954-2
5) UNI EN 10226-1 (ISO 7/1)

Date	24/02/2012	Article.	1630
Revision n°0		Designer.	Delaini P.
Description	Raccordo dritto maschio - Straight fitting male	Toll. Gen.	Js14

TDM Brass srl Via Artigiani,9 25030 Maclodio (Bs) -ITALY Tel. +39 030 9972217 www.tdmbrass.it e-mail:info@tdmbrass.it