
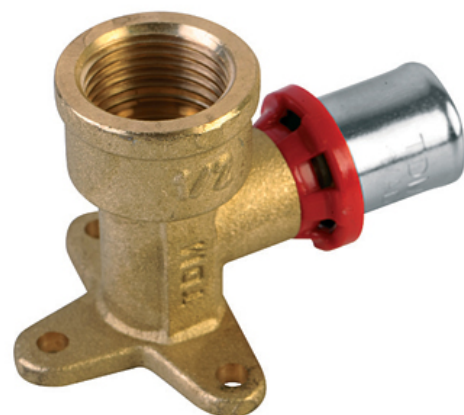



ΠΡΕΣΑΡΙΣΤΑ ΕΞΑΡΤΗΜΑΤΑ ΠΟΛΥΣΤΡΩΜΑΤΙΚΩΝ ΣΩΛΗΝΩΝ  
ΓΩΝΙΕΣ ΘΗΛΥΚΕΣ ΜΕ ΣΤΗΡΙΓΜΑ

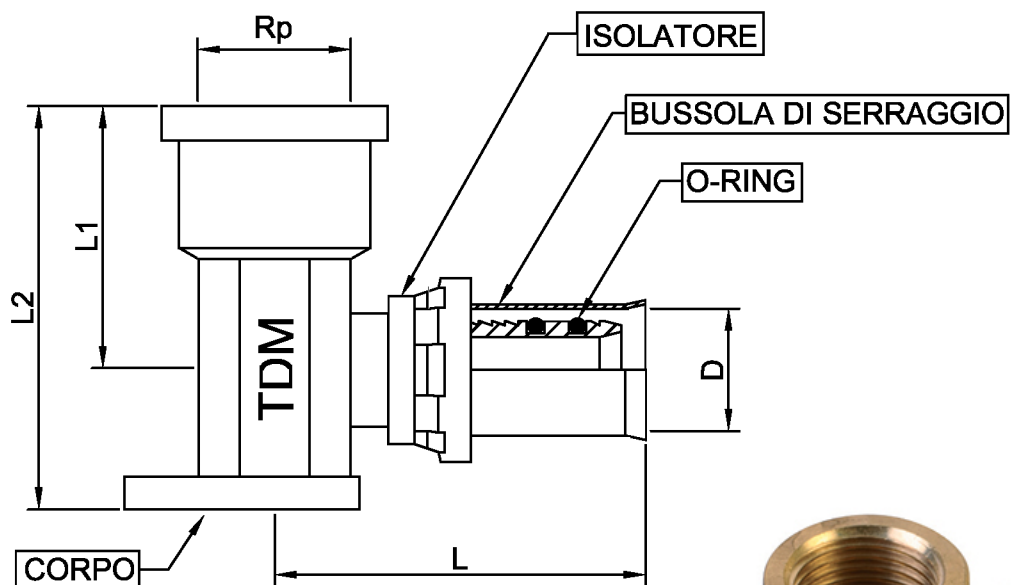

TDM Code	Size	Rp	D	L	L1	L2
1680 1216	1/2xØ16	1/2	Ø16 (2.0)	47.5	26.5	43.5
1680 1218	1/2xØ18	1/2	Ø18 (2.0)	48	33	53.5
1680 1220	1/2xØ20	1/2	Ø20 (2.0)	48	33	53.5

CORPO	CW 617N EN12165
BUSSOLA DI SERRAGGIO	AISI 304 EN 10088-2
O-RING	EPDM PEROX
ISOLATORE	NAYLON.6 (Red)
PRESSIONE MAX BAR	10
TEMPERATURA min-Max	-20°C / +120°C

CONFORME ALLE NORMATIVE
1) DM 174 del 6 Aprile 2004
2) UNI EN 1254-3
3) UNI EN ISO 9001-2008
4) UNI EN 10954-2
5) UNI EN 10226-1 (ISO 7/1)

Date	28/02/2012	Article. 1680			
Revision n°0				Designer.	Delaini P.
Description	Raccordo gomito femmina con staffa - Female elbow fitting with wallplate			Toll. Gen.	Js14
					
TDM Brass srl Via Artigiani,9 25030 Maclodio (Bs) -ITALY Tel. +39 030 9972217 www.tdmbrass.it e-mail:info@tdmbrass.it					