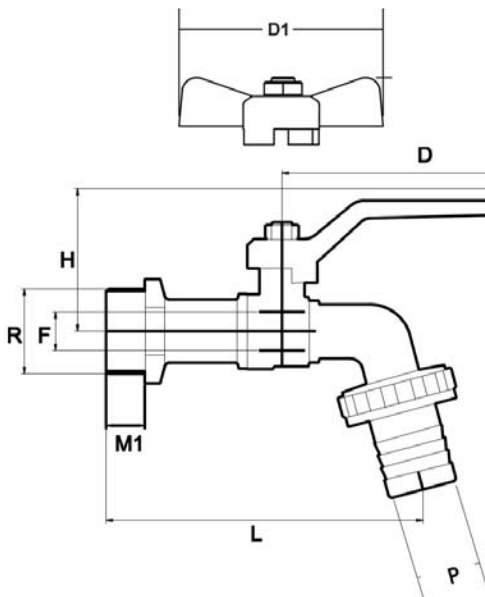


HOSE UNION BALL BIB-COCK NORMAL TYPE
ΚΑΝΟΥΛΕΣ ΟΡΕΙΧΑΛΚΙΝΕΣ


- BRASS "CW617N" BODY, BALL, STEM.
- BALL GROUND BY DIAMOND-TIPPED TOOL, NICKEL AND CHROMIUM PLATED.
- VIRGIN P.T.F.E. SEATS WITH 7° MIN. TIGHTNESS ANGLE.
- O-RING STEM PACKING IN NBR RUBBER.
- ALUMINIUM LEVER WITH, RED PLASTIC COATING.
- CHROMIUM PLATED FINISHING.
- THREADING TO ISO 228/1.
- 25 bar – T max. 90°C

LEADING DIMENSIONS


R	3/8"	1/2"	3/4"	1"
F (mm)	11	11	12	14
D (mm)	85	85	85	115
D1 (mm)	54	54	54	70
H (mm)	46	46	48	56
L (mm)	88	92	100	123
M1 (mm)	11	13	14	16
P (mm)	14	14	20	25
R1	3/4"	3/4"	1"	1 1/4"

WORKING PRESSURES AT 80° C MAX

PN 25	*	*	*	*	p.s.i. 375
	3/8"	1/2"	3/4"	1"	

PRESSURE DROPS

R	3/8"	1/2"	3/4"	1"
Kv		9	12	18